

# NX Nastran – Aeroelasticity

## Predicting performance of structures operating in the presence of an airstream

### Benefits


- Saves time and money by leveraging existing finite element models from NX Nastran – Basic
- Takes advantage of convenient modeling available with dynamic loads applied in the time or frequency domains
- Saves time by using an automated restart capability to independently investigate changes in structural or aerodynamic models
- Improves user confidence by avoiding undesirable aeroelastic behavior, such as flutter

### Summary

Aeroelastic analysis is a capability that enables the analysis of structural models in the presence of an airstream. With NX™ Nastran® – Aeroelasticity, an optional add-on module to NX Nastran – Basic software, you have access to static aeroelastic capabilities for stress, load, aerodynamic and control system analysis and design using a common finite element representation. As such, it is applicable in the design of airplanes, helicopters, missiles, suspension bridges and even tall chimneys and power lines.

### Predicting results in presence of an airstream

When your design calls for predicting structural performance in the presence of an airstream, NX Nastran – Aeroelasticity can play a key digital simulation role. This product offers subsonic aeroelastic analysis capabilities, providing access to static aeroelastic capabilities for stress, load, aerodynamic and control system analysis and design using a common finite element representation.

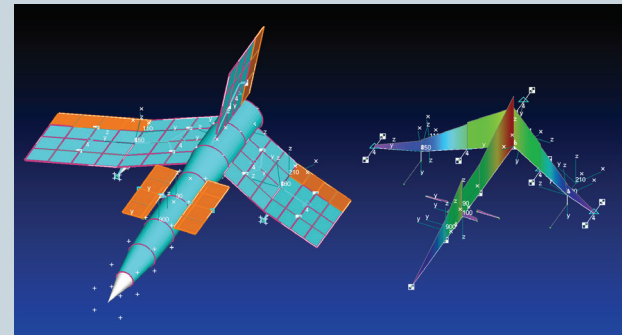

### Major capabilities

*Comprehensive aeroelastic capabilities:*

Static aeroelastic trim analysis

- Aeroelastic stability derivative calculation
- Static aeroelastic divergence analysis
- Flutter analysis
- Aeroelastic dynamic response analysis, including:
  - Modal frequency response
  - Modal transient response
  - Random response analysis
- Design sensitivity and optimization for aeroelastic response

NX

[www.siemens.com/nx](http://www.siemens.com/nx)

SIEMENS

## NX Nastran – Aeroelasticity

A suite of aerodynamic methods applicable across a range of Mach numbers:

- Subsonic doublet lattice method, including body interference
- Strip theory, applicable at any Mach number
- Supersonic Mach box method
- Supersonic piston theory

Specialized tools automate aeroelastic analysis and design:

- Aerodynamic models are easily generated using specialized meshing procedures
- Splines link the aerodynamic and structural models
- Weighting matrices and correction factors can be used to alter the analytical aerodynamic predictions to match, e.g., wind tunnel test results
- Redundant controls and simplified control laws are available for quasi-static trim including scheduled control surfaces, hinge moment limits and control surface deflection limits
- Electronic control systems can be included in the stability and response analyses to investigate aeroservoelastic effects

- Automated restart features allow a simple and cost-effective way to independently investigate changes in the structural or aerodynamic models or to perform additional analyses without regenerating basic structural and aerodynamic matrices
- Supplemental analysis allows groups working in different organizations, companies and/or countries to generate analyses and integrate them readily into a full vehicle design

The static aeroelastic features allow for stress, load, aerodynamic and control system analysis and design using a common finite element representation:

- Aeroelastic deformations of the structure are considered in the determination of applied loads, internal stresses and stability derivative values
- Test results can be incorporated to refine the analysis
- Restrained stability derivatives, applicable in a flight simulator, or unrestrained derivatives, applicable to test results, are both available
- Rigid aircraft results are available to provide checks on the deformed results
- Control surfaces are easily modeled and analyzed for their performance characteristics in specified maneuver conditions and for their aeroelastic effectiveness as a function of Mach number and dynamic pressure
- Hinge moments are calculated for all control surfaces

A flutter analysis toolbox is available to perform critical analyses:

- Flutter analysis methods available include:
  - The K-method is familiar to aeroelasticians and allows for general damping representations
  - The KE method provides an “efficient” variation of the K-method for detailed flutter analyses
  - The PK method provides realistic response estimates even when the system is not responding sinusoidally
- Control systems can be incorporated into the flutter analyses
- Oscillatory stability derivatives can be extracted from the generalized matrices

Dynamic aeroelasticity response can be applied to a variety of unsteady loadings including gust:

- One-dimensional gust loads are automatically computed and the aircraft response evaluated
- Dynamic loading can be applied in either the time or frequency domain with Fourier transform techniques used to convert time domain loads to the frequency domain and frequency domain responses to the time domain
- Store ejections and landing loads can be analyzed
- Random response analyses are available

Aeroelastic analyses are included in design sensitivity and optimization:

- A multidisciplinary capability is provided so that design conditions from static, normal modes and dynamic response analyses can be synthesized with aeroelastic responses
- Stability derivative values can be included in the design process
- Trim variable limits can be imposed in the design process
- Flutter damping levels can be used to preclude undesired flutter behavior
- The full design sensitivity and optimization capability outlined in the NX Nastran – Optimization fact sheet is available

**Table 1 – Analysis types in the aeroelastic module**

Aeroelastic analysis types	Solution sequence
Static aeroelastic analysis*	144, 200
Flutter analysis	145, 200
Dynamic aeroelastic analysis**	146
Aeroelastic design sensitivity	200
Aeroelastic optimization***	200

\* Includes trip analysis, stability derivative computations and static aeroelastic divergence.

\*\* Includes frequency, transient and random response analyses.

\*\*\* Requires the optional NX Nastran – Optimization module.

Contact  
Siemens Industry Software  
Americas +1 800 498 5351  
Europe +44 (0) 1276 702000  
Asia-Pacific +852 2230 3333

[www.siemens.com/plm](http://www.siemens.com/plm)

© 2013 Siemens Product Lifecycle Management Software Inc. Siemens and the Siemens logo are registered trademarks of Siemens AG. D-Cubed, Femap, Geolus, GO PLM, I-deas, Insight, JT, NX, Parasolid, Solid Edge, Teamcenter, Tecnomatix and Velocity Series are trademarks or registered trademarks of Siemens Product Lifecycle Management Software Inc. or its subsidiaries in the United States and in other countries. Nastran is a registered trademark of the National Aeronautics and Space Administration. All other logos, trademarks, registered trademarks or service marks used herein are the property of their respective holders.  
X3 2663 2/13 C